




# Series 1512Y

Bell Restraint Harness for C900 PVC Pipe  
Serrated Restraint Rings on Both Sides of the Bell

### Installation Instructions

1. The Series 1500 is designed for restraining push-on PVC pipe bells. It has a split, serrated restraint ring on the spigot and a split serrated ring behind the bell.
2. Assemble the push-on joint per the pipe manufacturer's instructions.
3. Install both halves of the serrated ring around the pipe behind the bell, tapping each half into place. Make sure that the complete ID of the ring is touching the pipe before installing the side bolts. Install the side bolts and tighten evenly to 110 ft-lbs. of torque. (60 ft-lbs. on 4-inch and 6-inch)
4. Remove the side bolts from the second serrated restraint ring. Use the Thrust Bolts to determine the proper location of the restraint ring on the spigot. Allow enough room on the thrust bolt to fully engage the nuts.
5. Install both halves of the restraint ring at the proper location, tapping each half into place. Make sure that the complete ID of the ring is touching the pipe before installing the side bolts. Tighten the side bolts evenly to 110 ft-lbs. (60 ft-lbs. on 4-inch and 6-inch)
6. Place nuts on the thrust bolts and tighten until they are snug. Allow enough room on the thrust bolts to fully engage the nuts. Do not tighten these bolts enough to force the spigot further into the bell of the joint.

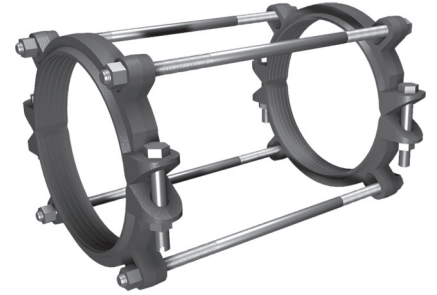

### CONTENTS

Qty.	Description
2	12 inch Series 1500 Split Restraint Ring
4	Fluoro coated Low Alloy Steel Tie Rods

### Restraints Made in The USA

For use on water or wastewater pipelines subject to hydrostatic pressure and tested in accordance with either AWWA C600 or ASTM D2774


APPROXIMATE SHIPPING WEIGHT: 58.20 lbs.

0716-G

Copyright 2021 © EBAA IRON, Inc. All Rights Reserved

### Series 1512Y

Bell Restraint Harness for C900 PVC Pipe  
Serrated Restraint Rings on Both Sides of the Bell

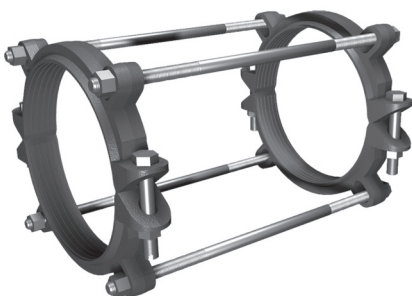

1 5 1 2 Y 0 0 0

### EBAA IRON SALES, Inc.

P.O. Box 857, Eastland, TX 76448

Tel: (254) 629-1731

Fax: (254) 629-8931

Toll: (800) 433-1716

contact@ebaa.com

www.ebaa.com

Made in the USA